

Linear Low/High Bay Gen 3



LINEAR HI-BAYS



LOW BAY - FROSTED LENS
50 WATT



HIGH BAY - CLEAR LENS
100 & 150 WATT

- Ideal for New Construction or Replacement of Conventional HID & Fluorescent Lighting
- Applications Include Manufacturing, Warehousing & Other Large Indoor Spaces
- 0-10V Dimmable
- Fast, Easy Installation with Pluggable Disconnect
- Precision Engineered Housing Provides Maximum Natural Convective Cooling for Low Lumen Loss
- All units are Modular & Linkable which allows same model units to make a continuous run - Connector Included
- Input Voltage: 120-277V
- Efficacy: 135 LM/W
- CRI: >81
- Color Temperature: 5000K
- THD: 5-9%
- PF: >.9
- Operating Temperature: -22°F to 104°F
- Light Pattern: 110° to 115°
- IP40 Damp Location Rated
- 50,000+ Hour Life Expectancy
- UL & DLC Listed
- 5 Year Warranty



71729A Motion Sensor



71736A Remote Controller




FIG 1



FIG 2

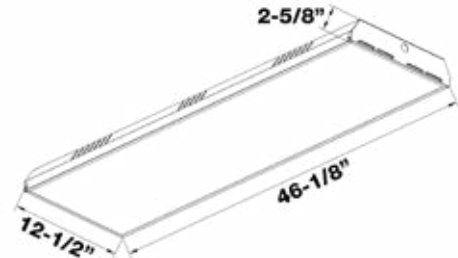


FIG 3

CAT. NO.	FIG	WATTS	LUMENS	REPLACES FLUORESCENT	LENS	CASE QTY	EACH	
LOW BAY								
71702B	1	50W	6,737	128W	FROSTED	1		
HIGH BAY								
71712B	2	100W	14,993	216W	CLEAR	1		
71722B	3	150W	22,248	324W	CLEAR	1		
71729A	MOTION SENSOR MODULE (120-277V FIXTURES ONLY)						1	
71736A	MOTION SENSOR CONTROLLER						1	
71701	SURFACE MOUNTING BRACKETS						25 SETS OF 2	
71716	EMERGENCY BATTERY BACKUP KIT						1	