

# LED WALL PACK

Model No.ESWP-120W1033cws

LED **ESWP-120W1033cws** provides 3 color temperatures and 4 wattage selections, over 100 degree angle creates a wide light distribution, ensuring a convenient application of bright clear light. This LED slim wall pack can withstand all weather conditions, while reducing your 80% electricity consumption - a must-have for commercial lighting buildings and outdoor areas. Enjoy additional features such as: 0-10V Dimming, Wet Rated, IP65 Protection, and Photocell.



## ±400W

REPLACEMENT

4 Wattage Selectable

3CCT Selectable

IP65 Protection

Photocell

0-10V Dimmable

Wet Rated

## Electrical Specifications

| Input Power | Equivalency | Lumen Output(3000K) | Lumen Output(4000K) | Lumen Output(5000K) | CCT             | Estimated Yearly Cost |
|-------------|-------------|---------------------|---------------------|---------------------|-----------------|-----------------------|
| 30 W        | 150W        | 3810LM              | 4080LM              | 3960LM              | 3000/4000/5000K | \$3.61                |
| 60 W        | 175W        | 7620LM              | 8160LM              | 7920LM              | 3000/4000/5000K | \$7.22                |
| 90 W        | 320W        | 11430LM             | 12240LM             | 11880LM             | 3000/4000/5000K | \$10.84               |
| 120 W       | 400W        | 15321LM             | 16353LM             | 15945LM             | 3000/4000/5000K | \$14.45               |


  

| Input Voltage | Luminous Efficacy | Beam Angle | CRI | Input Current | Power Factor | Lamp Lifespan |
|---------------|-------------------|------------|-----|---------------|--------------|---------------|
| 120-277 V     | 133-140 lm/W      | 100°       | 70  | 1.1 A         | 0.9          | 50,000 Hrs.   |

## Mechanical Specifications

| Rating    | Operational Temperature | Inner Box QTY. | Master Box QTY. | Dimensions(in.)                 | UPC Code     |
|-----------|-------------------------|----------------|-----------------|---------------------------------|--------------|
| Wet Rated | -40°F - 113°F           | N/A            | 1 qty.          | 13.39"(W) x 4.49"(D) x 9.45"(H) | 811174037965 |

## Product Dimensions

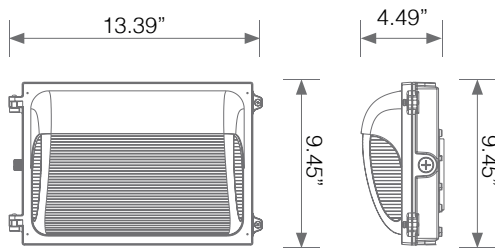

## Product Photometric Data

