



Project:	
Type:	
Catalog #:	



The LumeGen LED gooseneck dock light is a flexible and compact lighting solution for warehouse loading docks. With a 20-degree beam angle and bright 3000 lumen light output, it can easily be mounted between dock bays to provide optimal lighting conditional with loading or unloading a truck or container. It's IP65 rating, rubber-insulated steel gooseneck, and the corrosion-resistant mounting box with powder-coated safety yellow finish allows this fixture to stand-out and shine bright in even the harshest environment. The 9ft power cord with grounded plug ensure easy installation with no wiring necessary as long as an outlet is nearby, just mount the fixture, plug it in, and it's ready to go in minutes!


Product Features

- **Color Temperature:** 5000K Daylight
- **Power:** 20W (150W incandescent equivalent)
- **Housing Construction:** Cast Aluminum Housing for LED Head; Rubber Insulated Steel-Gooseneck; Powder-coated Metal Junction Box.
- **Optical Lens:** High Light transmittance PC lens
- **LED Brand:** CREE
- **Beam Angle:** 20°
- **LED Life Hours:** Rated to last 50,000 hours
- **Driver:** AC120-277V, 50/60Hz
- **Power Factor (PF):** > 0.9
- **Total Harmonic Distortion (THD):** <20%
- **Color Rendering Index (CRI):** >70

Safety & Performance Listings

- cETLus listed
- Complies with RoHS requirements.
- IP65 Rated (LED Lamp Head)

Dimension Drawing

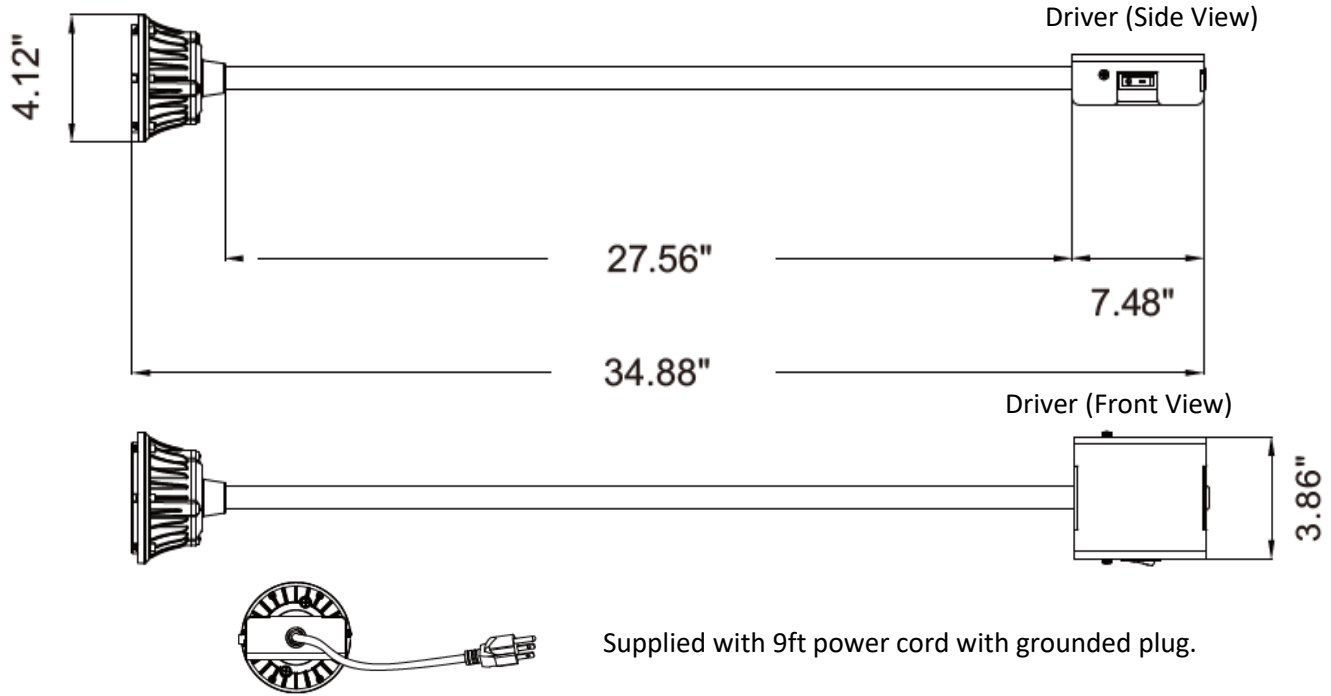

Electrical Specifications

SKU	Watts	Lumens	LPW	Power	CRI	CCT	Beam Angle	Mounting
LEDDOCK1000051000	20W	3000	150	120V Plug	>70	5000K	20°	Flush Wall Mount

Mounting & Operation

Hassle-Free installation

- 4 key slots for easy mounting.

Operation

- Convenient On/Off Toggle Switch.

Flexible gooseneck design

- Easily to bend and position. Will not sag over time.
- Can be rotated 180 degrees for use in any direction.

180°

High light transmittance PC lens

- 20° spot lighting for longer irradiation distance to illuminate up full length of truck trailers.
- Ideal for use in food warehouse.